

CF42 m/m  
CF45 m/m

**METL SPAN PANEL SYSTEM**  
**Allowable Single Span for Inward or Outward Load of 5 psf**

Panel Type	Thickness (in)	Design Criteria			Allowable Span (ft)
		Bending Stress	Shear Stress	Deflection Limit	
CF42MM-26/26	2	25.6	77.2	20.8	<b>20.8</b>
CF45MM-26/26	2.5	27.6	87.7	24.5	<b>24.5</b>
	3	29.2	97.1	27.9	<b>27.9</b>
	4	35.0	101.6	34.1	<b>34.1</b>
	5	39.5	114.5	39.8	<b>39.5</b>
	6	42.6	126.0	44.9	<b>42.6</b>

1. Based on panels with 26 ga. exterior & 26 ga. interior face (min  $F_y = 33$  ksi) for single span condition.
2. Allowable span is the lowest value of panel bending strength, shear strength and deflection limit.
3. The spans based on panel stress and deflection design criteria are derived from E-72 structural testing. The allowable loads are calculated with a factor of safety of 2.5 and 3.0 for bending and shear stresses, respectively, and deflection limitation of  $L/120$ .
4. The structural capacity of the girts and the panel attachment to the girts are not considered and must be examined independently.




CF42 LIGHT  
MESA

CF45 LIGHT  
MESA

**METL SPAN PANEL SYSTEM**  
**Allowable Single Span for Inward or Outward Load of 5 psf**

Panel Type	Thickness (in)	Design Criteria			Allowable Span (ft)
		Bending Stress	Shear Stress	Deflection Limit	
CF42LL-26/26	2	23.2	77.2	20.8	<b>20.8</b>
CF45LL-26/26	2.5	25.6	87.7	24.5	<b>24.5</b>
	3	27.1	97.1	27.9	<b>27.1</b>
	4	32.4	101.6	34.1	<b>32.4</b>
	5	34.6	114.5	39.8	<b>34.6</b>
	6	36.5	126.0	44.9	<b>36.5</b>

1. Based on panels with 26 ga. exterior & 26 ga. interior face (min  $F_y = 33$  ksi) for single span condition.
2. Allowable span is the lowest value of panel bending strength, shear strength and deflection limit.
3. The spans based on panel stress and deflection design criteria are derived from E-72 structural testing. The allowable loads are calculated with a factor of safety of 2.5 and 3.0 for bending and shear stresses, respectively, and deflection limitation of  $L/120$ .
4. The structural capacity of the girts and the panel attachment to the girts are not considered and must be examined independently.

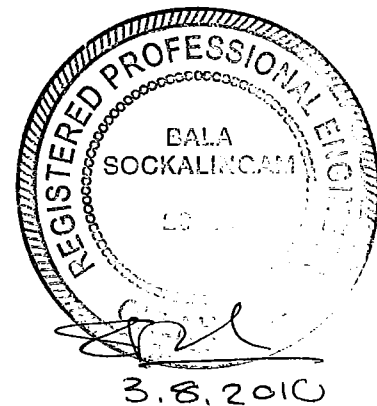

CFI 42 m/m

CFI 45 m/m

**METL SPAN PANEL SYSTEM**  
**Allowable Single Span for Inward or Outward Load of 5 psf**

Panel Type	Thickness (in)	Design Criteria			Allowable Span (ft)
		Bending Stress	Shear Stress	Deflection Limit	
CFI42MM-26/26	2	25.6	74.5	20.8	<b>20.8</b>
CFI45MM-26/26	2.5	27.6	84.6	24.5	<b>24.5</b>
	3	29.2	93.7	27.9	<b>27.9</b>
	4	35.0	109.7	34.1	<b>34.1</b>
	5	39.5	123.6	39.8	<b>39.5</b>
	6	42.6	136.1	44.9	<b>42.6</b>

1. Based on panels with 26 ga. exterior & 26 ga. interior face (min Fy = 33 ksi) for single span condition.
2. Allowable span is the lowest value of panel bending strength, shear strength and deflection limit.
3. The spans based on panel stress and deflection design criteria are derived from E-72 structural testing. The allowable loads are calculated with a factor of safety of 2.5 and 3.0 for bending and shear stresses, respectively, and deflection limitation of L/120.
4. The structural capacity of the girts and the panel attachment to the girts are not considered and must be examined independently.



CFI42 LIGHT  
MESA

**METL SPAN PANEL SYSTEM**  
**Allowable Single Span for Inward or Outward Load of 5 psf**

Panel Type	Thickness (in)	Design Criteria			Allowable Span (ft)
		Bending Stress	Shear Stress	Deflection Limit	
CFI42LL-26/26	2	23.2	74.5	20.8	<b>20.8</b>
CFI45LL-26/26	2.5	25.6	84.6	24.5	<b>24.5</b>
	3	27.1	93.7	27.9	<b>27.1</b>
	4	32.4	109.7	34.1	<b>32.4</b>
	5	34.6	123.6	39.8	<b>34.6</b>
	6	36.5	136.1	44.9	<b>36.5</b>

1. Based on panels with 26 ga. exterior & 26 ga. interior face (min  $F_y = 33$  ksi) for single span condition.
2. Allowable span is the lowest value of panel bending strength, shear strength and deflection limit.
3. The spans based on panel stress and deflection design criteria are derived from E-72 structural testing. The allowable loads are calculated with a factor of safety of 2.5 and 3.0 for bending and shear stresses, respectively, and deflection limitation of  $L/120$ .
4. The structural capacity of the girts and the panel attachment to the girts are not considered and must be examined independently.

